

APPLICATIONS

- Isolation for Gauge and other pressure instruments
- Isolation applications
- Viscous & corrosive media
- High-pressure & vibration applications

FEATURES

- 2 / 3 way connections
- Metal with Backlite Handle
- Drain Hole for Instrument Connection



GAUGE COCK -2WAY & 3 WAY, ANI30-1

DESCRIPTION

General

Thread design : ANSI B1.20.1 / BS EN ISO 228-1

Storage temperature : -40... +65°C

Service temperature : 190°C max.

Working Pressure : 100 bar max.

Material of construction

Body material : AISI 304 SS / AISI 316 SS / BRASS

Packing Material : PTFE



Standard version

Cock type : 2way [Standard], Option 3 way

Instrument connection : 1/2" NPT (F) / 1/2" BSP (F)

Process connection : 1/2" NPT (M) / 1/2" BSP (M)

GA DRAWING

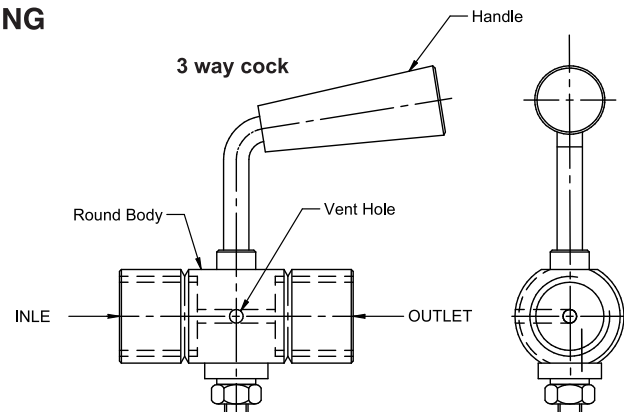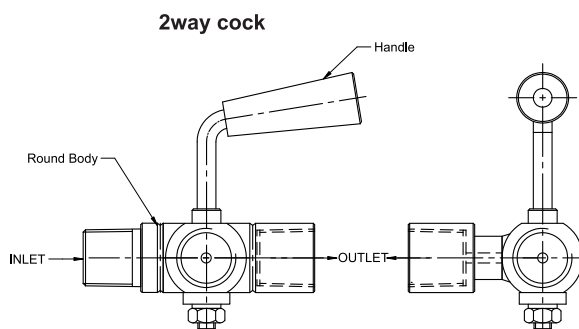

ORDERING CODES

MODEL

ANI30-1- Gauge Cock

ANI30-1

2W 2 Way Gauge cock

3W 3 Way Gauge cock

2W

BODY MATERIAL

S01 AISI 304 SS

S02 AISI 316 SS

S24 BRASS

S01

INSTRUMENT CONNECTION

P28 1/2" NPT (F)

P23 1/4" BSP (F)

P27 1/2" BSP (F)

P27

P24 1/4" NPT (F)

PROCESS CONNECTION

P04 1/4" NPT (M)

P08 1/2" NPT (M)

P20 M20X1.5mm (M)

P07

P03 1/4" BSP (M)

P05 3/8" BSP (M)

P07 1/2" BSP (M)

E90

E90 HYDRO TEST CERTIFICATE

E31 Material test certificate 3.1

E32 Material test certificate 2.2

Ordering Example : ANI21-R02.S01.S03.S02.P28.P08.L1.R1/XX.XX.XXXXX/XXX